


BRIGHT SMART ACCESS SWING GATE
BS-BZ11

24V safe voltage, DC brushless motor, working stable, long lifetime;
Supper thin at 120mm width, 304 stainless steel;
Bright stream LED;
Working speed is adjustable from 0.5s-1s;
Dual direction open by various access mode: card, sensor, face temperature measurement;
Photocell sensor protect function, auto-open if power failure;
Anti-crash, prevent the tailer, voice and light alarm device;

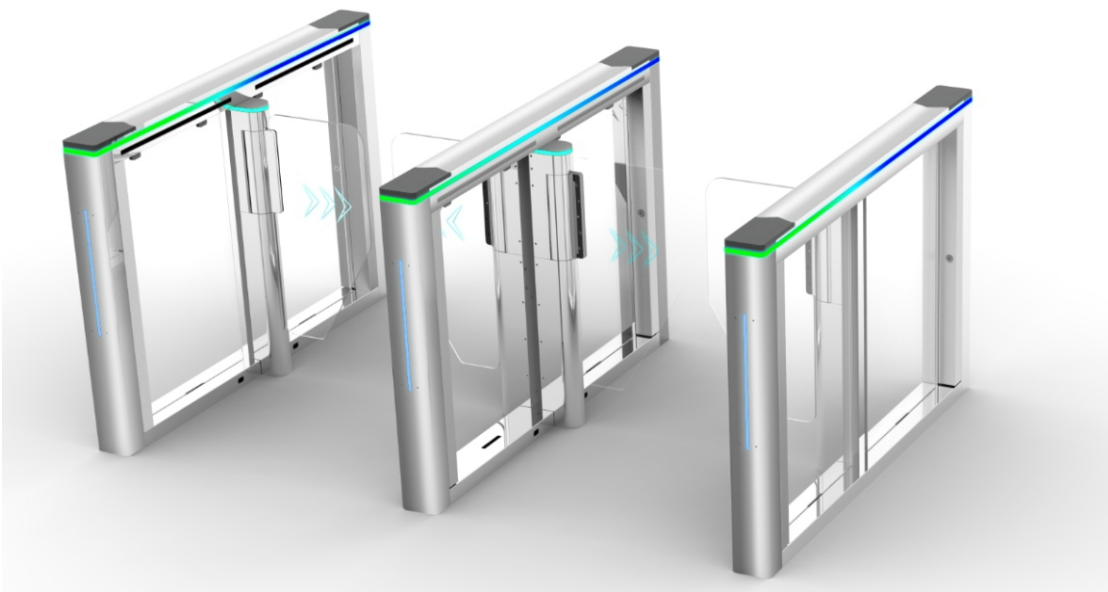

Technical Data

Power supply: 220V±10% 50Hz/110V 60Hz	Working sound: ≤65dB
Motor power: 24VDC 30W	Access width: 600-900mm
Working temperature: -20 °C - 70 °C	Communicate terminal: RS485
Open time: 0.3s~ 1s (Adjustable)	Open signal: Passive signal(Relay dry contact)
Access rate: 25-35 person/minute	Working environment: Indoor
Material: 304 Stainless Steel, thickness 1.5mm	Sensor pairs: 6

